



IATF16949:2016



MULTI-FUNCTION LED STROBE LIGHT

2026 NEW ARRIVAL



Foshan Xingyuan Auto Accessories Co.,Ltd

MULTI-FUNCTION LED STROBE LIGHT

Front Position Light Side Marker Light Rear Position Light



3 STROBE COLOR

Give you more choices



3X BRIGHTNESS

It can also attract attention during the day



R65

Amber Strobe Light



3X LONG SERVICE LIFE

Not having to replace frequently is more cost-effective

2 COLOR IN 1 & 3 COLOR IN 1



Front Position Light
(White)



Rear Position Light
(Red)



Side Marker Light
(Amber)

MULTI-FUNCTION LED STROBE LIGHT

**SINGLE
COLOR**

**EME
R148**

**EME
R65**

**EMC
R10**

10-32V

3X BRIGHTNESS

It can also attract attention during the day

3X LONG SERVICE LIFE

Not having to replace frequently is more cost-effective



SINGLE COLOR



JCTL-04-041A

Side Marker Light


Voltage	10-32V DC
Power	3W
IP-Class	IP67
Color lens	Clear
Color LED	White, amber, red
Connection	Cable
Cable length	200 mm
Material housing	Polycarbonate
Material lens	Polycarbonate
Operating temperature	-30°C - +60°C



JCTL-04-041R

Rear Position Light

► DIMENSIONS

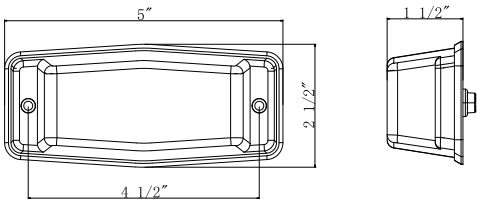

Clear Lens



JCTL-04-041CW

Front Position Light



JCTL-04-041CA

Side Marker Light



JCTL-04-041CR

Rear Position Light

MULTI-FUNCTION LED STROBE LIGHT

**SINGLE
COLOR**

**EME
R148**

**EME
R65**

**EMC
R10**

10-32V

3X BRIGHTNESS

It can also attract attention during the day

3X LONG SERVICE LIFE

Not having to replace frequently is more cost-effective

SMOKED LENS



Voltage	10-32V DC
Power	3W
IP-Class	IP67
Color lens	Smoked
Color LED	White, amber, red
Connection	Cable
Cable length	200 mm
Material housing	Polycarbonate
Material lens	Polycarbonate
Operating temperature	-30°C - +60°C



JCTL-04-041SKW

Front Position Light



JCTL-04-041SKA



Side Marker Light



JCTL-04-041SKR

Rear Position Light

► DIMENSIONS

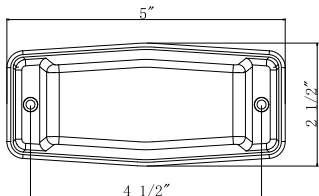

MULTI-FUNCTION LED STROBE LIGHT

 **With Synchronization function**

**EME
R148**

**EME
R65**

**EMC
R10**


 **10-32V**



Voltage	10-32V DC
Power	3W/2.5W
IP-Class	IP67
Color lens	Clear
Color LED	White , amber , red
Connection	Cable
Cable length	200 mm
Material housing	Polycarbonate
Material lens	Polycarbonate
Operating temperature	-30°C - +60°C



JCTL-04-042CA

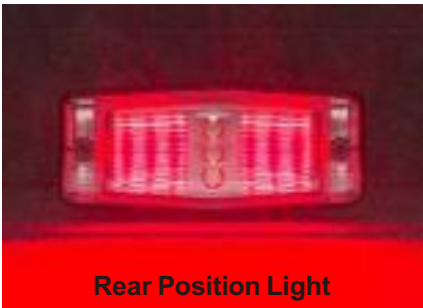


JCTL-04-042CR



JCTL-04-042CW

► DIMENSIONS

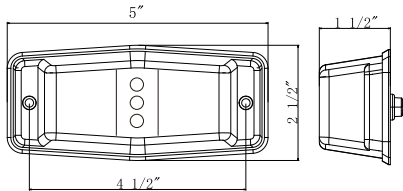

MULTI-FUNCTION LED STROBE LIGHT

 **With Synchronization function**

**EME
R148**

**EME
R65**

**EMC
R10**


10-32V

36

Flashing Pattern



Amber Strobe Light
R65

Smoked Lens



Voltage	10-32V DC
Power	3W/2.5W
IP-Class	IP67
Color lens	Smoked
Color LED	White , amber , red
Connection	Cable
Cable length	200 mm
Material housing	Polycarbonate
Material lens	Polycarbonate
Operating temperature	-30°C - +60°C

SINGLE COLOR



Side Marker Light

JCTL-04-042SKCA



Rear Position Light


JCTL-04-042SKCR



Front Position Light

JCTL-04-042SKCW

► DIMENSIONS

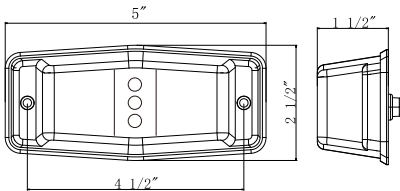

MULTI-FUNCTION LED STROBE LIGHT


 **With Synchronization function**

**EME
R148**

**EME
R65**

**EMC
R10**


10-32V

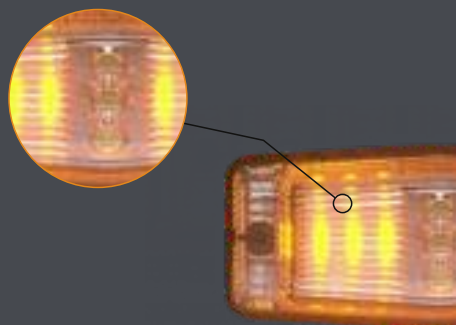

HIGH BRIGHTNESS CHIP

Provide good lighting at any time and place, with a long service life



OPTICAL FILTER

Good transparency
light can be transmitted over a long distance



Amber Strobe Light R65

DOUBLE COLOR



Rear Position Light
(Red)

Side Marker Light
(Amber)

JCTL-04-042CAR



Front Position Light
(White)

Side Marker Light
(Amber)

JCTL-04-042CAW



Front Position Light
(White)


Rear Position Light
(Red)

JCTL-04-042CRW

Voltage	10-32V DC
Power	3W/2.5W
IP-Class	IP67
Color lens	Clear
Color LED	White , amber , red
Connection	Cable
Cable length	200 mm
Material housing	Polycarbonate
Material lens	Polycarbonate
Operating temperature	-30°C - +60°C



Clear Lens

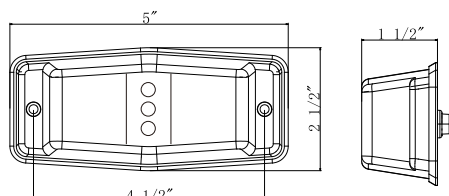

WIDE APPLICABILITY

It can be used for various vehicles



MULTI-FUNCTION LED STROBE LIGHT

 **With Synchronization function**

**EME
R148**

**EME
R65**

**EMC
R10**

 **10-32V**



36
Flashing Pattern

DOUBLE COLOR



Rear Position Light
(Red)

Side Marker Light
(Amber)



Front Position Light
(White)

Side Marker Light
(Amber)



Front Position Light
(White)


Rear Position Light
(Red)

JCTL-04-042SKCAR

JCTL-04-042SKCAW

JCTL-04-042SKCRW

► DIMENSIONS

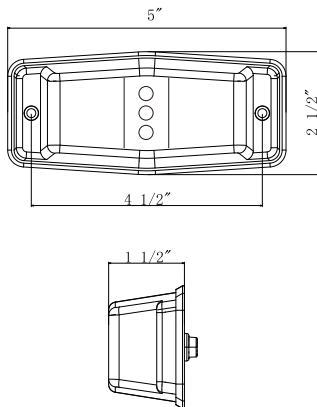

Voltage	10-32V DC
Power	3W/2.5W
IP-Class	IP67
Color lens	Smoked
Color LED	White , amber , red
Connection	Cable
Cable length	200 mm
Material housing	Polycarbonate
Material lens	Polycarbonate
Operating temperature	-30°C - +60°C



Smoked Lens

MULTI-FUNCTION LED STROBE LIGHT

 **With Synchronization function**

**EME
R148**

**EME
R65**

**EMC
R10**


10-32V



TRIPLE COLOR

JCTL-04-042CTC



Front Position Light
(White)





Rear Position Light
(Red)



Side Marker Light
(Amber)

► DIMENSIONS

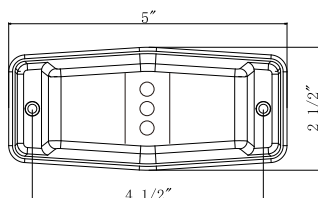

Voltage	10-32V DC
Power	3W/2.5W
IP-Class	IP67
Color lens	Clear
Color LED	White , amber , red
Connection	Cable
Cable length	200 mm
Material housing	Polycarbonate
Material lens	Polycarbonate
Operating temperature	-30°C - +60°C



Clear Lens



Amber Strobe Light
R65

MULTI-FUNCTION LED STROBE LIGHT

 **With Synchronization function**

**EME
R148**

**EME
R65**

**EMC
R10**


10-32V

36
Flashing Pattern




TRIPLE COLOR

JCTL-04-042SKCTC



► DIMENSIONS

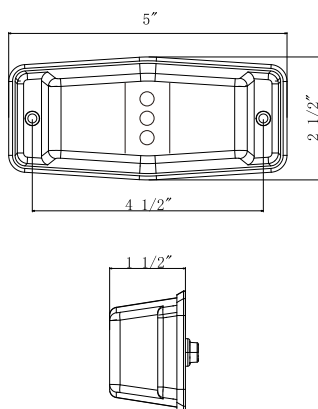

Voltage	10-32V DC
Power	3W/2.5W
IP-Class	IP67
Color lens	Smoked
Color LED	White, amber, red
Connection	Cable
Cable length	200 mm
Material housing	Polycarbonate
Material lens	Polycarbonate
Operating temperature	-30°C - +60°C



Smoked Lens

**2026
NEW ARRIVAL**

LED STROBE LIGHT



Clear Lens JCTL-04-041



Smoked Lens JCTL-04-041SK



**2026
NEW ARRIVAL**

MULTI-FUNCTION LED STROBE LIGHT



Clear Lens JCTL-04-042SK

Smoked Lens JCTL-04-042SK



R65 Amber Strobe Light



R65 Amber Strobe Light



MULTI-FUNCTION LED STROBE LIGHT

 **With Synchronization function**

**EME
R148**

**EME
R65**

**EMC
R10**


10-32V



36
Flashing Pattern

Amber Strobe Light

Halo



Clear Lens



Side Marker Light

LED-20016A



Rear Position Light

LED-20016R




Front position light

LED-20016W

Input Voltage	LensMaterial	Light source	LED	Waterproof	Ambient Temperature	Housing Material
DC12-24V	PC	3W high power LED	6 LEDS	IP67	-30~60°C	Aluminium

► DIMENSIONS



MULTI-FUNCTION LED STROBE LIGHT

 **With Synchronization function**

**EME
R148**

**EME
R65**

**EMC
R10**


10-32V

36
Flashing Pattern

Amber Strobe Light

Halo

Smoked Lens

Side Marker Light

Rear Position Light

Front position light


LED-20016SKA

LED-20016SKR

LED-20016SKW

Input Voltage	Lens Material	Light source	LED	Waterproof	Ambient Temperature	Housing Material
DC12-24V	PC	3W high power LED	6 LEDS	IP67	-30~60°C	Aluminium

► DIMENSIONS



EME
R148

EME
R65

EMC
R10

⚡
10-32V

MULTI-FUNCTION LED STROBE LIGHT

HALO & STROBE



LED-20016 Series

01 Halo



02 LED Strobe light



03 Clear Lens/Smoked Lens



04 Customizable in multiple colors...



Factory, Your Products Factory 3000+ Products for your choice

MULTI-FUNCTION LED STROBE LIGHT

 **With Synchronization function**

**EME
R148**

**EME
R65**

**EMC
R10**


10-32V

Customizable in multiple colors...

LED-20016 series

36
Flashing Pattern



WHITE HALO- WHITE CENTRE



WHITE HALO- BLUE CENTRE



WHITE HALO- AMBER CENTRE



RED HALO - AMBER CENTRE



RED HALO - GREEN CENTRE



RED HALO - WHITE CENTRE



AMBER HALO- BLUE CENTRE



AMBER HALO- AMBER CENTRE



RED HALO - BLUE CENTRE



BLUE HALO- AMBER CENTRE




BLUE HALO- WHITE CENTRE




GREEN HALO- AMBER CENTRE



BLUE HALO- BLUE CENTRE

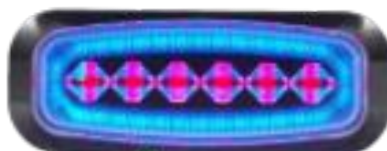

BLUE HALO- RED CENTRE

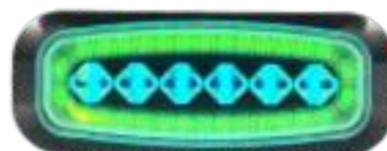

GREEN HALO- BLUE CENTRE

2026
NEW ARRIVAL

MULT-FUNCTION
LED STROBE LIGHT
Clear Lens

Part no. LED-20016A



Part no. LED-20016R



Part no. LED-20016W



2026
NEW ARRIVAL

MULT-FUNCTION LED STROBE LIGHT

Smoked Lens

Part no. LED-20016SKA



Part no. LED-20016SKR




Part no. LED-20016SKW



MULTI-FUNCTION LED STROBE LIGHT

NEW



Customizable Colors

Customizable Colors

SPECIFICATIONS

Light Source	4 High Intensity 1 Watt LED's
Current Draw Amps	0.56A @ 13.8V
Mounting Type	Screw Mounting
Material	Aluminum Housing + PC lens
Wiring	200mm Pre-Wired
Approvals	CE, ECE, SAE

LED-1813H




Part no. LED-1813HW

FUNCTIONS: Front position light



DIMENSIONS



MOUNTING BRACKET ACCESSORIES



Part no. LED-1813HR

FUNCTIONS: Rear Position Light



Part no. LED-1813HA

FUNCTIONS: Side Marker Light



**2026
NEW ARRIVAL**

MULTI-FUNCTION LED STROBE LIGHT


Part no. LED-1813HA



Part no. LED-1813HR



Part no. LED-1813HW

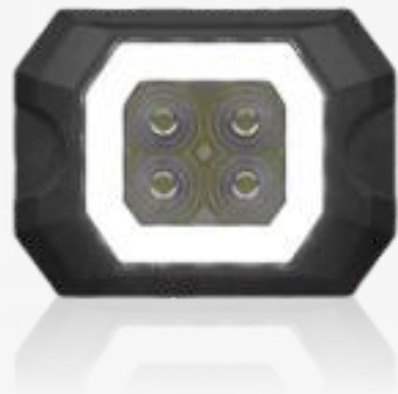

LED STROBE LIGHT



SAE

With Synchronization function



LED-1813





SPECIFICATIONS

Light Source	4 High Intensity 1 Watt LED's
Voltage	12-24V
Mounting Type	Screw Mounting
Material	Aluminum Housing + PC lens
Wiring	200mm Pre-Wired
Approvals	CE, ECE, SAE



DIMENSIONS



Part no. LED-1813A



Part no. LED-1813R



Part no. LED-1813W



Part no. LED-1813B

MINI LOW-PROFILE LED TAIL LIGHT



EME
R148

ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION



Front Position Light



Side Marker Light



Rear Position Light



Part no. LED-20021-W




Part no. LED-20021-A




Part no. LED-20021-R

► DIMENSIONS



Flat Base

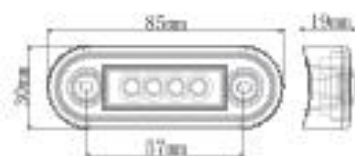

Curved Base


► SPECIFICATIONS

Base Material	ABS
Light source	3W high power LED
LED	4LEDS
Waterproof	IP65
Ambient Temperature	-30~60°C
Lens Material	Clear Lens



Curved Base

5.5inch LINE PLATE & COMPACT LED GRILL FLASHER



With Synchronization function


LED

ECE
R65

EMC
R10

RoHS
Certificate

12-24V



LED-1821ST-W




LED-1821ST-A



LED-1821ST-R

LED-1821ST

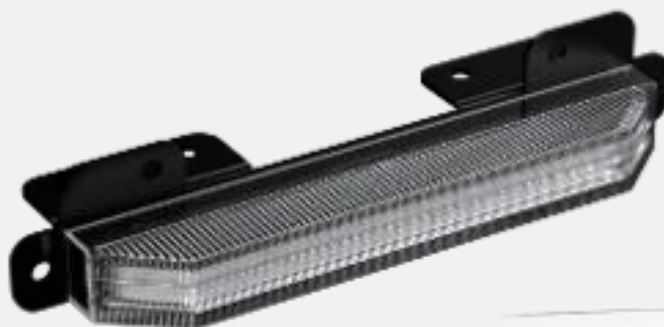

3 Optional Mounting Method

FIGURE 1

L Bracket Mounting



FIGURE 2

Offset Mounting



FIGURE 3

Surface Mounting



Technical specification



Input Voltage

DC12-24V



Light Source

High Power LED



Working Temperature

-30 °C ~ +60 °C



Lens Material

PC



Waterproof


IP65



36

Flashing Patterns

Dimensions

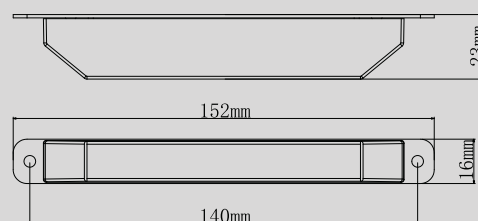

5.5inch LED Clearance Light / LED Side Marker Light

Part no. **LED-1821**



Part no. **LED-1821W**

Front Position Light



Part no. **LED-1821A**

Side Marker Light



Part no. **LED-1821R**


Rear Position Light



3 Optional Mounting Method

FIGURE 1	FIGURE 2	FIGURE 3
L Bracket Mounting	Offset Mounting	Surface Mounting

► DIMENSIONS

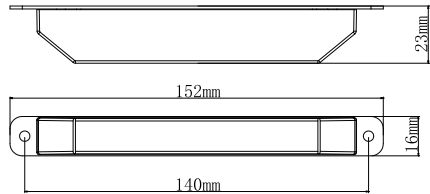

Input Voltage	Lens Material	Light source	Waterproof	Ambient Temperature	Housing Material
DC12-24V	PC	High Power LED	IP65	-30~60°C	Aluminium

NEW ARRIVAL

5.5 Inch Line Plate & Compact Led Grill Flasher

Part no. LED-1821ST



5.5inch LED Clearance Light / LED Side Marker Light

Part no. LED-1821



**2026
NEW ARRIVAL**

6" LED REARLIGHTS

SINGLE COLOR

Part no. JCTL-01-031W



Part no. JCTL-01-031A




Part no. JCTL-01-031R



**2026
NEW ARRIVAL**

**6" MULTI FUNCTIONS
LED REARLIGHTS**
DOUBLE COLOR

Part no. JCTL-01-031WR

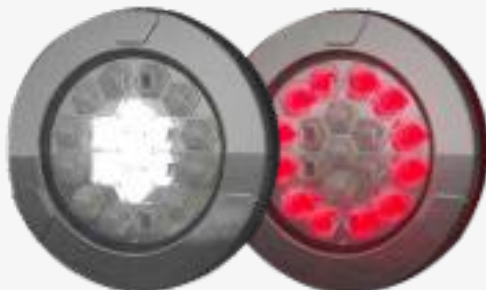

Part no. JCTL-01-031AR



Part no. JCTL-01-031RR



Part no. JCTL-01-031FR



LED STROBE LIGHT

NEW



With Synchronization function



LED-20086B



LED-20086R



LED-20086W




LED-20086A

SPECIFICATIONS

Light Source	6 High Intensity 1 Watt LED's
Mounting Type	Screw Mounting
Material	Aluminum Housing + PC lens
Wiring	200mm Pre-Wired
Approvals	CE, ECE, SAE



LED-20086



• DIMENSIONS



LED STROBE LIGHT

NEW

CHROME



With Synchronization function



LED-20086CH-B



LED-20086CH-R




LED-20086CH-W



LED-20086CH-A

SPECIFICATIONS

Light Source	6 High Intensity 1 Watt LED's
Mounting Type	Screw Mounting
Material	Chrome Housing + PC lens
Wiring	200mm Pre-Wired
Approvals	CE, ECE, SAE

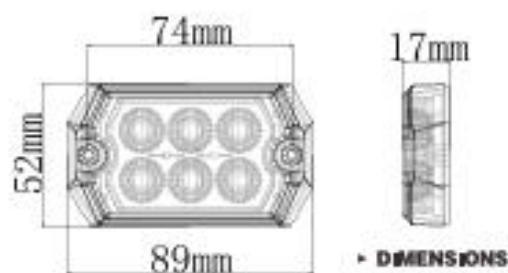

REAR LIGHTS AND POSITION LIGHT FOR TRUCK

ECE
R10

✓
RoHS


🔥
IP65

⚡
12-24V

ARRIVAL
NEW

**SMOKED
LENS**

JCTL-02-011SK

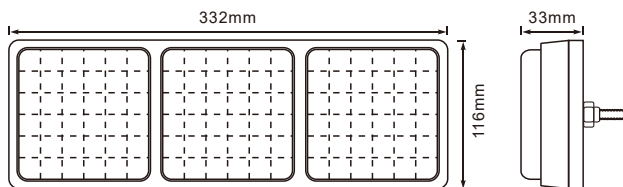

Input Voltage

Light Source

Housing Material

Lens Material

Waterproof

Input Voltage

DC12/24V

LED


ABS

PC

IP65

Direction indicator
Brake light
Rear position light

REAR LIGHTS AND POSITION LIGHT FOR TRUCK

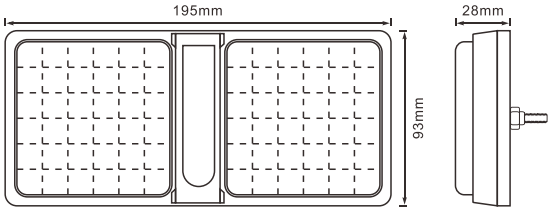

Input Voltage	Light Source	Housing Material	Lens Material	Waterproof	Input Voltage
DC12/24V	LED	ABS	PC	IP65	Direction indicator Brake light Rear position light/Reflector

REAR LIGHTS AND POSITION LIGHT FOR TRUCK




Approval No.:
E9-6R01-29-23492-00
E9-23R00-22-22249-00
E9-38R00-19-22184-00
E9-7R02/27*23804-00



SMOKED
LENS

JCTL-03-001SK



Input Voltage	Light Source	Housing Material	Lens Material	Waterproof	Input Voltage
DC12/24V	LED	ABS	PC	IP65	Direction indicator Brake light Rear position light

REAR LIGHTS AND POSITION LIGHT FOR TRUCK




Approval No.:
E9-6R01-29-23492-00
E9-23R00-22-22249-00
E9-38R00-19-22184-00
E9-7R02/27*23804-00



SMOKED
LENS

JCTL-03-002SK



Input Voltage	Light Source	Housing Material	Lens Material	Waterproof	Input Voltage
DC12/24V	LED	ABS	PC	IP65	Direction indicator Brake light Rear position light

REAR LIGHTS AND POSITION LIGHT FOR TRUCK

ECE
R10

✓
RoHS

🔥
IP65


⚡
12-24V

ARRIVAL
NEW




**SMOKED
LENS**

JCTL-02-023SK

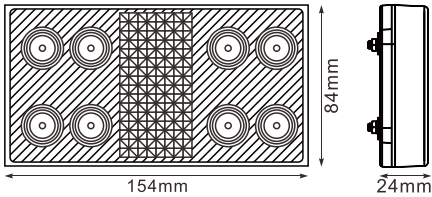

Input Voltage	Light Source	Housing Material	Lens Material	Waterproof	Input Voltage
DC12/24V	LED	ABS	PC	IP65	Direction indicator Brake light Rear position light/Reflector

REAR LIGHTS AND POSITION LIGHT FOR TRUCK



Input Voltage	Light Source	Housing Material	Lens Material	Waterproof	Input Voltage
DC12/24V	LED	ABS	PC	IP65	Direction indicator Brake light Rear position light/Reflector

LED TRAILER LIGHT

ECE
R10

✓
RoHS


🔥
IP65

⚡
12-24V

ARRIVAL
NEW



LED-T002SK

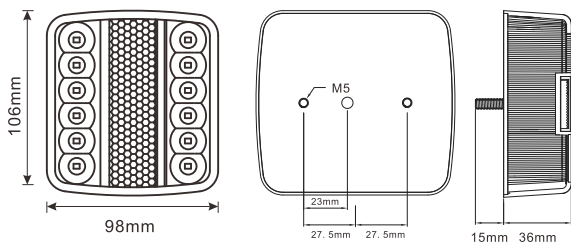

Input Voltage	Light Source	Housing Material	Lens Material	Waterproof	Input Voltage
DC12/24V	LED	ABS	PC	IP65	Direction indicator Brake light Rear position light/Reflector

LED TRAILER LIGHT

ECE
R10

✓
RoHS

🔥
IP65


⚡
12-24V

ARRIVAL
NEW



**SMOKED
LENS**

TB-63SK

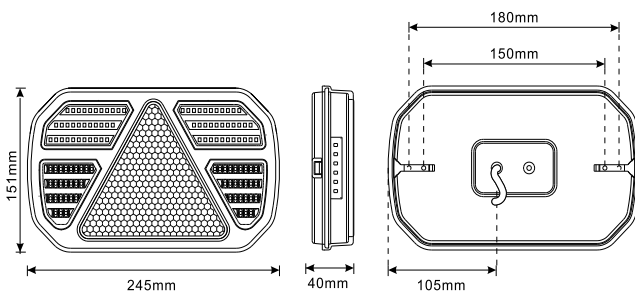

Input Voltage

Light Source

Housing Material

Lens Material

Waterproof

Input Voltage

DC12/24V

LED

ABS

PC

IP65

Rear Position/Direction Indicator/
Brake/Reflector/license plate/
Fog Light

LED CLEARANCE LIGHT

ECE
R148


ECE
R10

✓
RoHS

🔥
IP66

⚡
10-30V

ARRIVAL
NEW

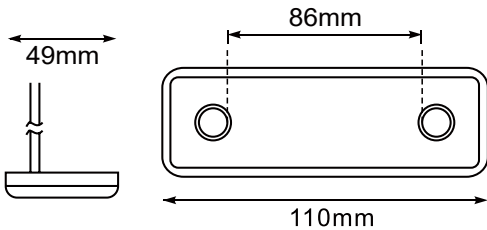

Input Voltage	Light Source	Operating Temperature	Lens Material	Waterproof	Input Voltage
10-30V	LED	-40°C~+60°C	PC	IP66	LED side marker LAMP

LED CLEARANCE LIGHT

ECE
R148

ECE
R10

✓
RoHS


🔥
IP66

⚡
10-30V

ARRIVAL
NEW



JCTL-04-028SK

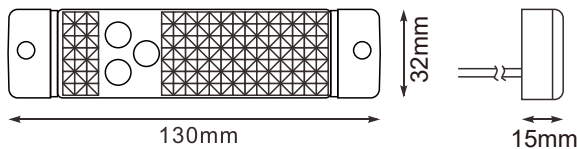

Input Voltage	Light Source	Operating Temperature	Lens Material	Waterproof	Input Voltage
10-30V	LED	-40°C~+60°C	PC	IP66	LED side marker LAMP

LED CLEARANCE LIGHT




Approval No.:
White E9 148R00/05 16478 00
Amber E9 148R00/05 16479 00
Amber E9 148R00/05 16480 00

**SMOKED
LENS**



JCTL-04-030SK

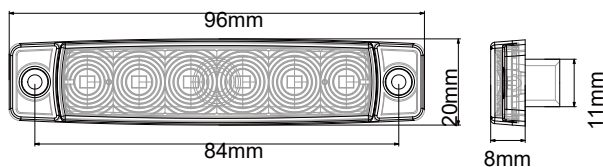


Input Voltage	Light Source	Operating Temperature	Lens Material	Waterproof	Input Voltage
DC12/24V	LED	-40°C~+60°C	PC	IP67	High power LED

LED CLEARANCE LIGHT-3FUNCTION




JCTL-04-026SK

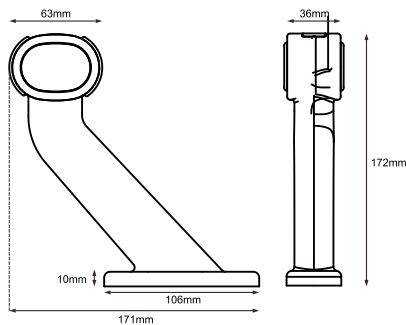

Input Voltage	Light Source	Operating Temperature	Lens Material	Waterproof	Input Voltage
DC12/24V	LED	-40°C~+60°C	PC	IP65	Front position lamp Rear position lamp Side marker lamp

LED CLEARANCE LIGHT-3FUNCTION

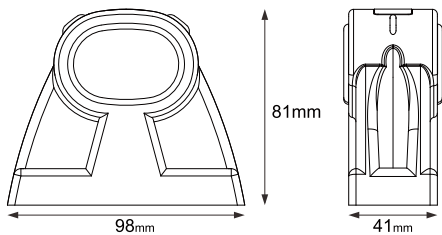

Input Voltage	Light Source	Operating Temperature	Lens Material	Waterproof	Input Voltage
DC12/24V	LED	-40°C~+60°C	PC	IP65	Front position lamp Rear position lamp Side marker lamp

LED STALK SIDE MARKER LIGHT



ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION




MULTI-
VOLTAGE
12-24V

► SPECIFICATIONS

Part no. JCTL-04-050

VOLTAGE	12-24V DC
3 FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C ~ +70°C

► DIMENSIONS

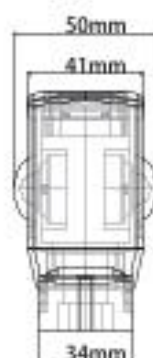

LED STALK SIDE MARKER LIGHT



ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION




MULTI-
VOLTAGE
12-24V

► SPECIFICATIONS


Part no. JCTL-04-051

VOLTAGE	12-24V DC
3 FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C~ +70°C

► DIMENSIONS



LED STALK SIDE MARKER LIGHT



ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION


MULTI-
VOLTAGE
12-24V

► SPECIFICATIONS

Part no. JCTL-04-052

VOLTAGE	12-24V DC
3 FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C ~ +70°C

► DIMENSIONS

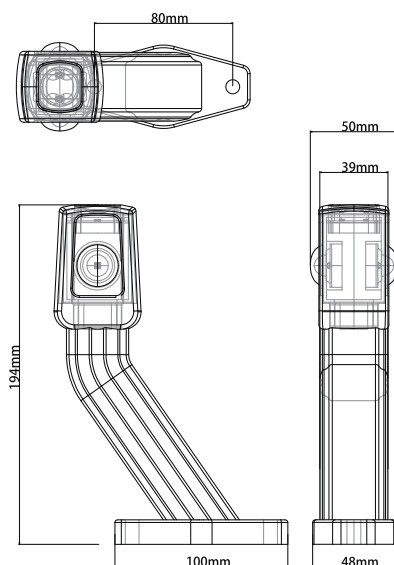

LED STALK SIDE MARKER LIGHT



ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION


MULTI-
VOLTAGE
12-24V

► SPECIFICATIONS

Part no. JCTL-04-053

VOLTAGE	12-24V DC
3 FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C ~ +70°C

► DIMENSIONS

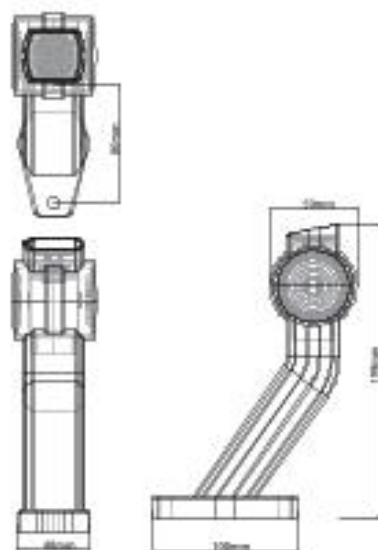

LED STALK SIDE MARKER LIGHT



ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION

MULTI-
VOLTAGE
12-24V


► SPECIFICATIONS

Part no. JCTL-04-054

VOLTAGE	12-24V DC
3FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C~ +70°C



► DIMENSIONS

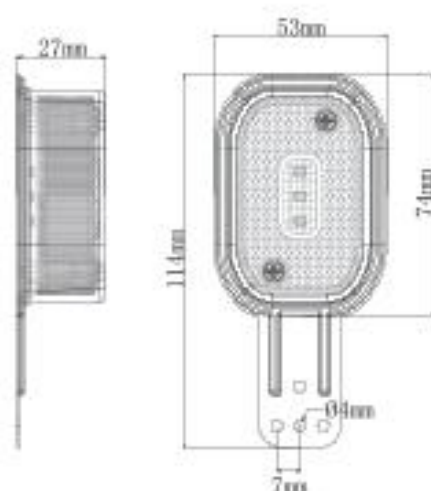

► SPECIFICATIONS

Part no. JCTL-04-054N

VOLTAGE	12-24V DC
3FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C~ +70°C



LED STALK SIDE MARKER LIGHT



ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION

MULTI-
VOLTAGE
12-24V


► SPECIFICATIONS

Part no. JCTL-04-061

VOLTAGE	12-24V DC
3 FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C ~ +70°C



► DIMENSIONS

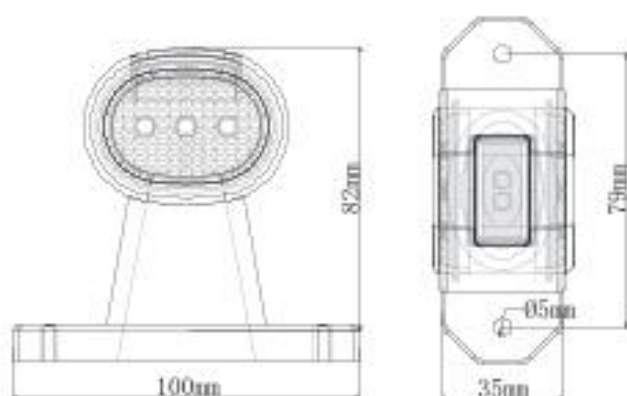

LED STALK SIDE MARKER LIGHT



ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION


MULTI-
VOLTAGE
12-24V

► SPECIFICATIONS

Part no. JCTL-04-063P

VOLTAGE	12-24V DC
3 FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C ~ +70°C

► DIMENSIONS

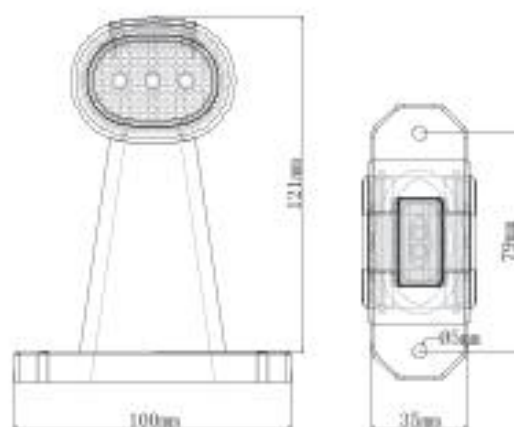

LED STALK SIDE MARKER LIGHT



ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION


MULTI-
VOLTAGE
12-24V

► SPECIFICATIONS

Part no. JCTL-04-064P

VOLTAGE	12-24V DC
3 FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C ~ +70°C

► DIMENSIONS

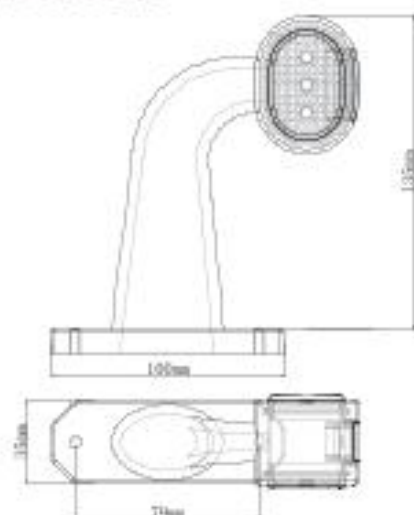

LED STALK SIDE MARKER LIGHT



ECE
R10

✓
RoHS

IP65
INGRESS
PROTECTION


MULTI-
VOLTAGE
12-24V

► SPECIFICATIONS


Part no. JCTL-04-065P

VOLTAGE	12-24V DC
3 FUNCTIONS	SIDE MARKER LIGHT
IP-CLASS	IP65
EMC-CERTIFICATE	ECE R10
OPERATING TEMPERATURE	-30°C ~ +70°C

► DIMENSIONS

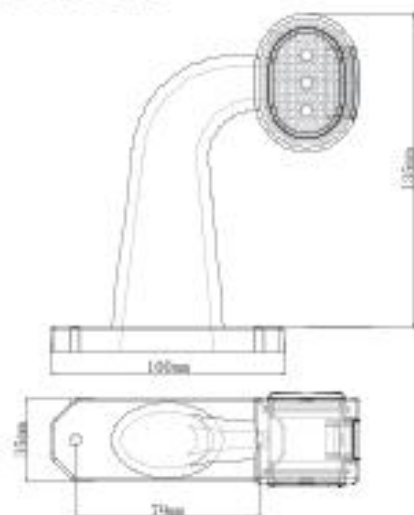








WARNING BEACON LIGHT

- ❶ WL430
- ❷ WL1007
- ❸ WL300MAX

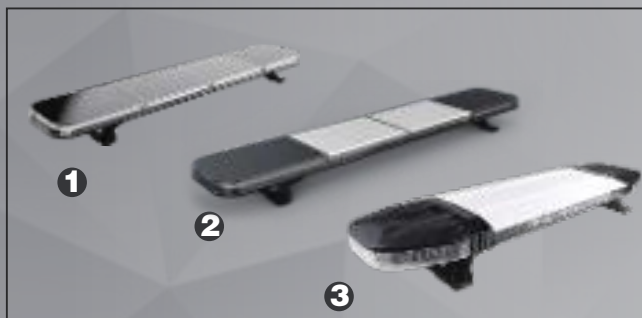

EMERGENCY LED LIGHT BAR

600mm 900mm 1200mm 1500mm

- ❶ LTF-85 TA2 | ECE R65
- ❷ LTF-85C TA2 | ECE R65 With Front Position Light
- ❸ LTF-50LPRO



EMERGENCY LED LIGHT BAR

600mm 900mm 1200mm 1500mm

- ❶ LTF-72 TA2 | ECE R65
- ❷ LTF-74 TA2 | ECE R65 With Front Position Light
- ❸ LTF-66 EMCRT0 ECE R65 CLASS I
- ❹ LTF-17L
- ❺ LTF-19L



LED CLEARANCE LIGHT

Side Marker Light

- ❶ JCTL-04-027A
- ❷ JCTL-04-028A
- ❸ JCTL-04-030A
- ❹ JCTL-04-001A
- ❺ JCTL-04-042A
- ❻ JCTL-04-012A
- ❼ JCTL-04-034A
- ❽ LED-1813HA

Rear Position Light

- ❶ JCTL-04-034R
- ❷ JCTL-04-028R
- ❸ JCTL-04-030R
- ❹ JCTL-04-001R
- ❺ JCTL-04-042R
- ❻ JCTL-04-012R
- ❼ LED-1813HR

Front Position Light

- ❶ JCTL-04-027W
- ❷ JCTL-04-028W
- ❸ JCTL-04-030W
- ❹ JCTL-04-001W
- ❺ JCTL-04-042W
- ❻ JCTL-04-012W
- ❼ JCTL-04-034W
- ❽ LED-1813HW



LED STROBE LIGHT

- ❶ JCTL-04-042W DRL Function
- ❷ LED-20016 DRL Halo
- ❸ LED-1813HW DRL Halo
- ❹ LED-20014
- ❺ LED-4A
- ❻ LED-4B



MULTI-FUNCTION LED SCENE LIGHTS

JCTL-06-006A Down Light Side Marker Light



LED BAR LIGHT WITH R65 APPROVED STROBE FUNCTION

- ❶ 210740X LED bar light combined with strobe light & drl
- ❷ 210740A AMBER DRL | LED bar light combined with strobe light & drl
- ❸ 210667DC Double color LED bar light
- ❹ 210950K 15.7inch bar lights x 3pcs



9.5 " LED DRIVING LIGHT

- ❶ 210905
- ❷ 210910
- ❸ 210911
- ❹ 210774
- ❺ 210775
- ❻ 210776



7 " LED DRIVING LIGHT

- ❶ 210777
- ❷ 210781
- ❸ 210666
- ❹ 210912
- ❺ 210952
- ❻ 210955



LED WORK LIGHTS

- ❶ 211109
- ❷ 210723
- ❸ 210726
- ❹ 210731D-BK
- ❺ 210731D-BK
- ❻ 210733D-BK
- ❼ 210735F
- ❽ 210729S
- ❾ 210435



LED DOUBLE FACE LIGHT

- ❶ TL414051
- ❷ TL414048
- ❸ TL417004



LED CLEARANCE LIGHT

- ❶ JCTL-04-026R 3FUNCTION
- ❷ JCTL-04-029 3FUNCTION



REAR LIGHTS AND POSITION LIGHT FOR TRUCK

- ❶ JCTL-02-023
- ❷ JCTL-02-011
- ❸ JCTL-02-002
- ❹ JCTL-02-025
- ❺ JCTL-01-031R
- ❻ JCTL-01-020
- ❼ JCTL-03-024



INTEGRATED REAR LIGHT BOARD FOR HEAVY-DUTY TRUCK

- ❶ TLB-005
- ❷ TLB-008
- ❸ TLB-010



I A T F 1 6 9 4 9 : 2 0 1 6